


BRIDGE & SUPPLY CO.

400 Stoney Creek Dr., P.O. Box 151, Sandusky, MI 48471 (810) 648-3000, Fax: (810) 648-3549
3520 36th St., S.E., Grand Rapids, MI 49512 (616) 940-2660, Fax: (616) 940-0169

SLR (Standing Loc Rib)

CUSTOM LENGTH CONCEALED FASTENER PANEL

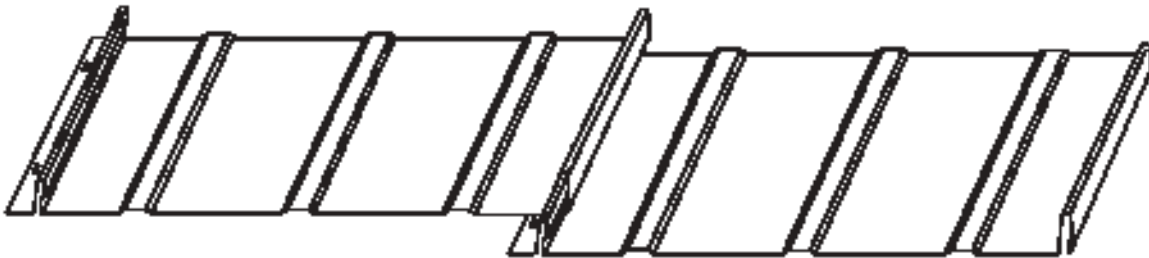



- Architectural/Residential Standing Seam Panel
 - Nail Strip Panel System
 - Concealed Fasteners
 - Available in Lengths 2' - 30'
 - 16" Panel Coverage, 1" Rib Height
 - Gauges: 26GA, 24GA
 - Available in Flat Pan or with Stiffener Ribs
 - Minimum Roof Slope: 3:12
 - Pre-cut Slots for Pancake Screws
 - Applies over Solid Substrate
 - Available Finishes Include Fluorocarbon, Flouropolymer, and Bare Galvalume™
 - Panels Cannot be End Lapped
-
-

STANDING LOC RIB


TECHNICAL INFORMATION

Stock Colors Available

Patriot Red	Black
Ocean Blue	Regal White
Burnished Slate	Charcoal
Burgundy	Evergreen

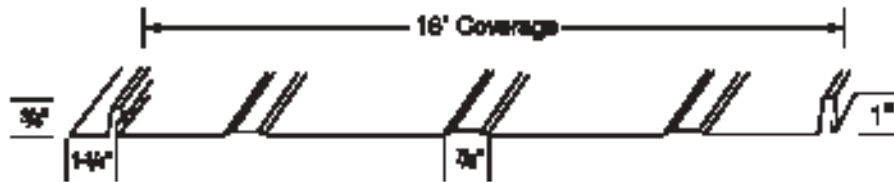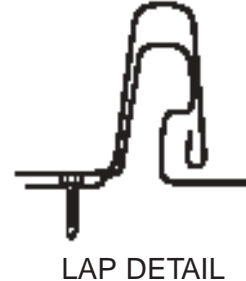

WITH STIFFENER RIBS

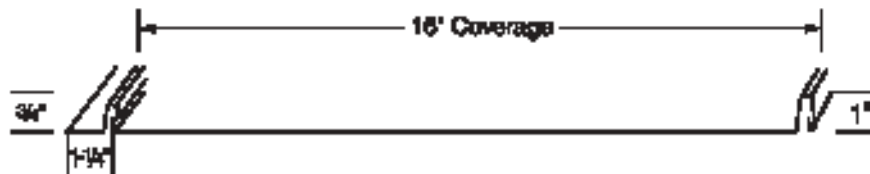

FLAT PAN

PAINT FINISH:

SLR features Valspar's 30 year Fluorpon® paint finish with:

Top Coat: .2 Mils DFT Primer, .8 Mils DFT Top Coat

Bottom Coat: .2 Mils DFT Primer, .3 Mils DFT Backer

PERFORMANCE PROPERTIES:

ASTM D 3361 Accelerated Weathering – No more than #8 rating after 1,000 hours.

ASTM B 117 Salt Spray – No more than #7 rating, 1/16" (2mm), after 1,000 hours.

ASTM D 2247 Humidity – No more than #10 rating, no blisters, after 2,000 hours.

ASTM D 3363 Pencil Hardness – HB – 2H minimum.

ASTM E 84 Flame Test – Class A coating.
