


FEATURES AND BENEFITS

- Manufactured from EPDM or silicone rubber, Roofjack™ SQ is compounded for maximum resistance to ozone, UV light, & temperature extremes.
- Flexible aluminum base will allow the flashing to conform to any metal roof configuration. Pipe location can be centered in the flat of the panel or the rib. Urethane sealant & self-drilling screws complete the installation
- Roofjack SQ are well marked so they can easily be cut with shears to fit exactly the pipe size used.
- Roofjack SQ are available in Black or Gray EPDM & Red Silicone.
- Square Roofjack SQ can be turned so corner is pointing up the roof. It will act as a water diverter.

RoofjackSQ™

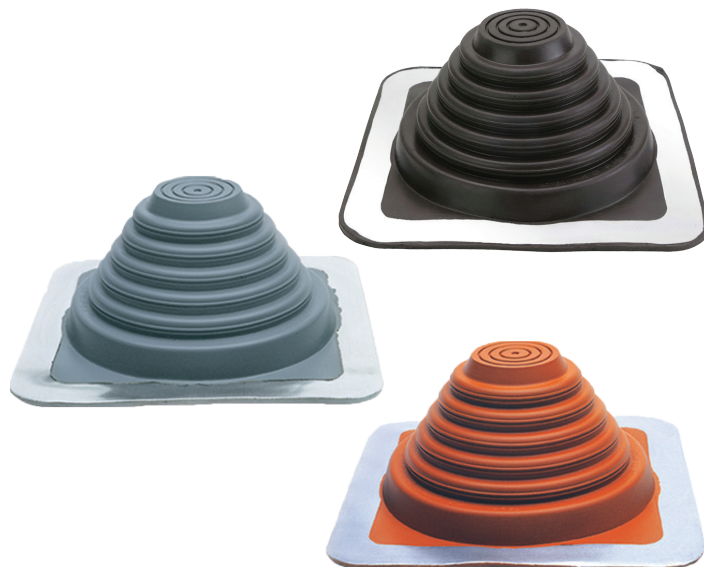

	PIPE SIZE	BASE DIMENSION	COLOR MATERIAL	CARTON QUANTITY	WEIGHT PER CARTON
MINI	1/8"-3/4"	2 - 1/4" (57mm)	Black/Gray EPDM & Red Silicone	15	2.5
#1	1/4"-2-3/4"	4-1/2" (114mm)	Black/Gray EPDM & Red Silicone	15	2.5
#2	7/8"-4"	6" (152mm)	Black/Gray EPDM & Red Silicone	15	4.5
#3	1/4"-5-3/4"	8" (203mm)	Black/Gray EPDM & Red Silicone	15	7.5
#4	2-3/4"-7"	10" (254mm)	Black/Gray EPDM & Red Silicone	10	8.0
#5	4"-8-1/4"	11" (279mm)	Black/Gray EPDM & Red Silicone	10	9.5
#6	4-3/4"-10"	12" (304mm)	Black/Gray EPDM & Red Silicone	10	12.0
#7	5-1/2"-11-1/2"	14" (355mm)	Black/Gray EPDM & Red Silicone	10	15.5
#8	6-3/4"-13-1/2"	17" (431mm)	Black/Gray EPDM & Red Silicone	5	12.8
#9	9-1/2"-20-1/2"	25" (635mm)	Black/Gray EPDM & Red Silicone	5	19.3
MAXI	12"-28-1/2"	34" (863mm)	Black/Gray EPDM & Red Silicone	5	25.6

	EPDM 500	SILICONE
Advanced Ozone Resistance Tested to...	70 hr @500 pphm	70 hr @ 500 pphm
High Temperature Resistance Tested to Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+500°F)
Low Temperature Resistance tested to...	-55°C (-65°F)	-74°C (-100°F)
Tensile Set Maximum...	10MPa (1450psi)	5MPa (700psi)
Compression Set Maximum...	25%	50%

EASY INSTALLATION



1. Choose pipe opening and trim 2. Slide over pipe opening and trim



3. Form to roof profile 4. Apply sealant 5. Fasten to complete

